

METROPOLIS

DOIMOSOFAS
www.doimosofas.com

STRUCTURE: Norwegian conifer plywood panel.

SPRING SEATING: Elastic straps in polypropylene (65%) and rubber (35%), fixed with metal staples in a diagonal pattern.


ARMREST AND CUSHIONS COVER: Elastic straps in polypropylene (65%) and rubber (35%), fixed with metal staples in a diagonal pattern.

CUSHIONS PADDING: *Seat* – polyurethane foam D/40 PFM density 40 kg/m³ capacity 3.2 kPa. *Seat front padding* – polyurethane foam D/40 PFM density 40 kg/m³ capacity 8.0kPa. *Back* – polyurethane foam D/35 PFFR density 35 kg/m³ capacity 2.2 kPa. *Back rear padding* – polyurethane foam D/40 PFM density 40 kg/m³ capacity 8.0kPa. *Armrest* – polyurethane foam D/40 PF density 40 kg/m³ capacity 4.7 kPa.

COVER: Leather. For types of covers available and their care, please refer to the attached specification sheet.

CHARACTERISTICS: This product is not classified as fire- retardant.

FINISH: Iron frame varnished in black (RAL 9011) - dark grey (RAL 7022) - light grey (RAL 7037) - white (RAL 9002).

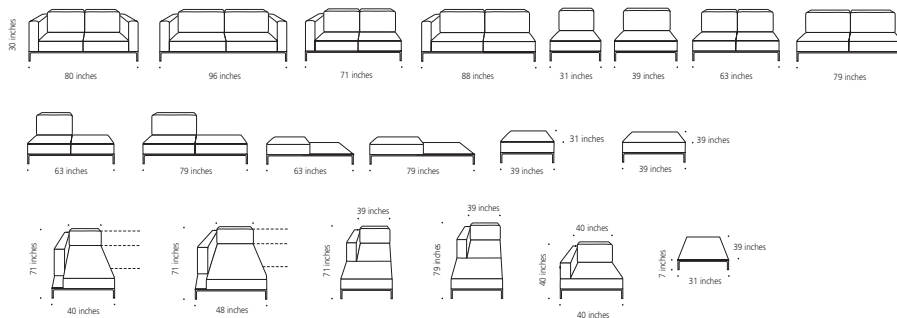

MEASURE